

Office of the Vice President and Chief Financial Officer

Procurement Services https://procurement.ufl.edu/

971 Elmore Drive PO Box 115250 Gainesville, FL 32611-5250 (352) 392-1331 Fax 352-392-8837

August 25, 2020

ADDENDUM NUMBER 3 ON INVITATION TO BID ITB21KO-102

TITLE: Exterior Doors Replacement at Whitney Lab Building 1012

This addendum shall be considered part of the Contract Documents for the above-mentioned project as though it had been issued at the same time and incorporated integrally therewith. Where provisions of the following supplementary data differ from those of the original Contract documents, this addendum shall govern and take precedence. Bidders are hereby notified that they shall acknowledge receipt of the addendum.

This addendum consists of:

- Revised Bid Schedule:
 - Contractor questions are due no later than 5:00PM on September 9, 2020. Send questions to Karen Olitsky at kolitsk@ufl.edu.
 - Bids are due no later than 3:00PM on September 23, 2020. Submit bids as stated in Item 4.
 BID SUBMITTAL, page 4 of the bid documents. Bid opening will be held remotely, a link to the meeting will be posted on the Schedule of Bids webpage prior to the bid opening date/time.
- · Revised Price Page
- Revised Technical Specifications
- · Revised Attachment A
- Attachment B

Karen Olitsky Procurement Agent III

PLEASE ACKNOWLEDGE RECEIPT OF THIS ADDENDUM 3 AND RETURN WITH YOUR BID. FAILURE TO ACKNOWLEDGE THIS ADDENDUM COULD CONSTITUTE REJECTION OF YOUR BID.

VENDOR NAME		
VENDOR ADDRESS		
SIGNATURE		

PRICE SHEET - REVISED 8/25/2020

From		
	(Company Name)	
	(Name & Title of Authorized Agent)	
То:	UNIVERSITY OF FLORIDA Procurement Services 971 Elmore Drive Elmore Hall Rm101 Gainesville, FL 32611	
	ndersigned, being invested with tl e Bid, as well as the Specifications	he authority of his/her employer, and having read the Documents for the Bid, entitled:
	ITB21KO-102, Exterior D	oors Replacement at Whitney Lab Building 1012
pricin and s other agree	g and delivery of the product and services as per the specifications, documents relating thereto on f	If with all conditions affecting and governing the specifications, services described herein, hereby proposes to furnish the products in strict compliance with the Bid Documents, Addenda and any file with UF Procurement Services and, if awarded the Contract, and completion date as per the Documents and as stated herein,
BAS	E BID:	
TOTA	L COST OF MATERIALS* (INCLU SHIPPING/DELIVERY CO	UDING PSTS): \$
	TOTAL COST OF LA	ABOR: \$
	TOTAL BID PR	RICE: \$
*All r	materials to be supplied should	d be listed separately and submitted with bid.
		contact documents described above, I have full authority to make and all statements are true and correct.
(Signat	ure)	(Printed or typed)
(Addre	ss, City State, Zip)	
(Teleph	none)	(Date)

ITB21KO-102 Addendum 3 2 of 5

TECHNICAL SPECIFICATIONS – REVISED 8/25/2020

Scope of Work: This ITB is for the replacement of 13 steel exterior doors at Whitney Lab Building #1012, 9505 Oceanside Blvd. St Augustine, Florida. All doors are to be replaced with doors manufactured of new impact rated fiberglass, commercial quality design. This ITB consists of a Base Bid for for new vendor provided doors, frames, all hardware, installation and UF permit fees and demolition of current doors and frames.

List of Doors to be replaced:


- See Attachment A for door locations.
- See Attachment B list of doors.

Base Bid price will include:

- New vendor provided doors and frames as noted in Attachment B.
- All needed commercial hardware for hanging and installation of each door: hinges, panic bars, schlage locks and closers, exterior handles, door seals; keyed, removable Mullins; hardware to consist of 316 stainless steel, as noted in Attachment B.
- Doors noted on Attachment B should be prepped for EPT in doors and frames.
- Installation of all doors and frames. Installation will be into masonry walls.
- UF permit cost for door replacement. Fee schedule can be found here: http://www.ehs.ufl.edu/programs/buildcode/codes/fees/

Awarded vendor will be responsible for verifying measurements after Purchase Order is issued and prior to placing order for the doors.

ITB21KO-102 Addendum 3 3 of 5

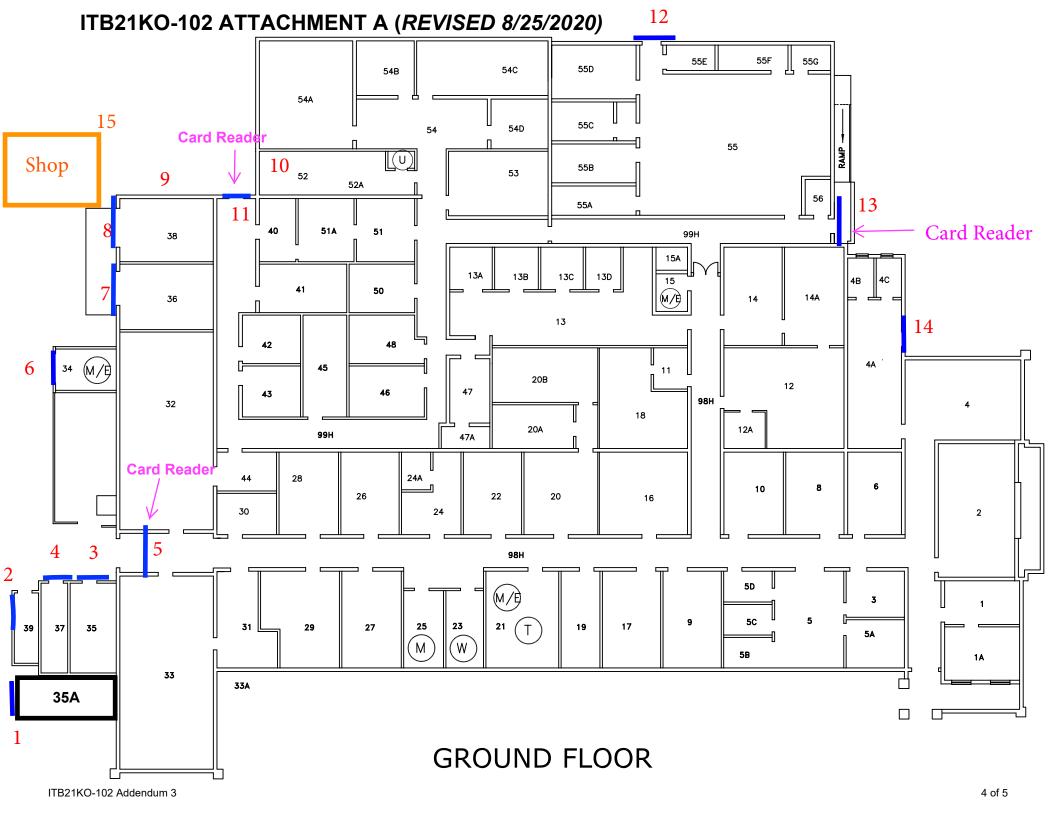

ITB21KO-102 ATTACHMENT B

		LEFT OR RIGHT	IN OR OUT	HEIGHT OF ROUGH	WIDTH OF BOUGH								Prep for EPT, jams and			
DOOR	DOOR TYPE	HAND	OPENING	OPENING	OPENING	MULLON NEEDED	PANIC BARS NEEDED	HINGES	Mortise center	Hinge 1	Hinge 2	Hinge 3	-	Door Closers	Light kit	NOTES
						keyed/Removable		Stainless steel hinges								
1	Double door		out	80"	75"	no	no	4 1/2"						Yes		
2	Single	Left	out	83"	52"	no	no	4 1/2"						Yes		
3	Single	Left	out	82 1/4"	40"	no	no	4 1/2"						Yes		
							2 panic bars, one on									
4	Double door		out	82 1/2"	75 1/2"	Yes	each side	4 1/2"					Yes	Yes	7x27	
5	Door only, single	left	out	80"	39 1/8"	no	no	4 1/2"	40"	5 1/8"	35 1/8"	65 1/8"		Yes		
6	Double door		out	88 1/2"	71 5/8"	yes	no	4 1/2"						Yes		
7	Double door		out	82"	71 1/4"	no	no	4 1/2"						Yes		Internal head and toe bolts on inactive door
8	Roll up door (not included in this solicitation)			9	7											
9	Door only, single	Left	out	79 1/8"	35 3/4"	no	no	4 1/2"	38 1/2"	6 5/8"	37 5/8"	68 5/8"		Yes		
10	Single	Left	In	82"	40"	no	no	4 1/2"						Yes		
							2 panic bars, one on									
11	Double door		out	82 1/4"	77"	yes	each side	4 1/2"					Yes	Yes		
12	Single	right	out	82 1/4"	39 1/2"	no	1 panic bar	4 1/2"						Yes		
							2 panic bars, one on									
13	Double door		out	82"	80 3/4"	yes	each side	4 1/2"					Yes	Yes		
14	Single	right	out	82 1/2"	39 3/4"	no	1 panic bar	4 1/2"						No		
15	Roll up door (not included in this solicitation)			97"	10'											

All doors require new jams, unless noted "Door only"
Hurricane rated doors
All rough openings are concrete block construction
Awarded bidders will verify measurements prior to manufacture
Measurements are for bidding proposals only

ITB21KO-102 Addendum 3 5 of 5